

TRANSPORT DIMENSIONS

Length: 17.6m (57'9")
 Height: 3.45m (11'4")
 Width: 3m (9'11")
 Weight (Est.): 335,500kg (39.13 US Ton)

HOPPER

14ft = 8.15m³ (10.6cu.yds)
 Reject grid as standard

OPTIONS

- Radio controlled tracking
- Roll-in bogie prepared
- Roll-in bogie equipped
- Dual power
- Dust suppression
- Auto lubrication system
- Vibrating grizzly
- Anti roll-back

MAIN CONVEYOR

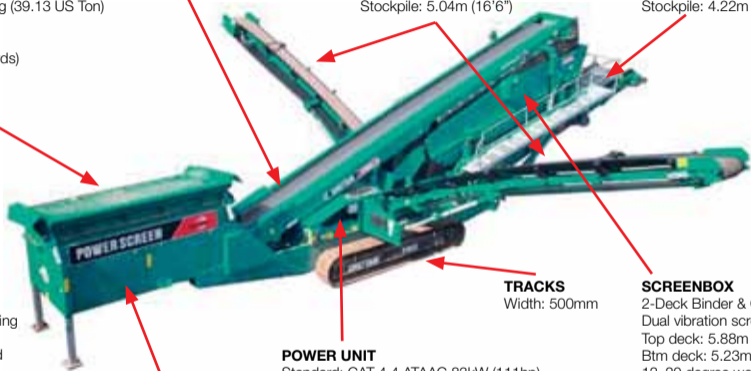
1050mm (42") wide
 Hydraulically adjustable

SIDE CONVEYORS

800mm (32") wide
 Hydraulic folding
 Variable speed control
 Stockpile: 5.04m (16'6")

TAIL CONVEYOR

1200mm (48") wide
 Hydraulic folding for transport
 Set-down for mesh changing
 Stockpile: 4.22m (13'10") @ 24°

**FEEDER CONVEYOR**

Width: 1200mm (48")
 Direct drive
 Variable speed control

TRACKS

Width: 500mm

POWER UNIT

Standard: CAT 4.4 ATAAC 83kW (111hp)
 Option 1: CAT C4.4 ATAAC ACERT 97kW (130hp)
 Option 2: Deutz TCD 2013 LO4 125kW (168hp)
 576 L (153 US Gal)
 Diesel tank: 336 L (89 US Gal)

SCREENBOX

2-Deck Binder & Co Bivitec Screenunit
 Dual vibration screening system
 Top deck: 5.88m x 1.55m (19'4" x 5'1")
 Btm deck: 5.23m x 1.55m (17'2" x 5'1")
 12-20 degree working angle
 Eliminated clogging & blinding
 2 Bearing, grease filled system
 Adjustable screen angle
 Screen walkways