

TRANSPORT DIMENSIONS**Track Version**

Length: 15.4m (50'6")
 Height: 3.2m (10'6")
 Width: 2.75m (9')
 Weight (Est): 24,900kg (27.42 US Ton)

Wheel Version

Length: 16.95m (55'7")
 Height: 3.9m (12'8")
 Width: 2.75m (9')
 Weight (Est): 22,000kg (24.25 US Ton)

FEEDER CONVEYOR

Width: 1050mm (42")
 Individual variable speed

OPTIONS

- Wheel or track mobile
- Double deck vibrating grizzly
- Radio controlled tracking
- Anti roll-back
- Dual power
- Roll-in bogie prepared
- Roll-in bogie equipped
- Quick release screen wedge tensioning
- Washing version
- Auto lubrication system

HOPPER

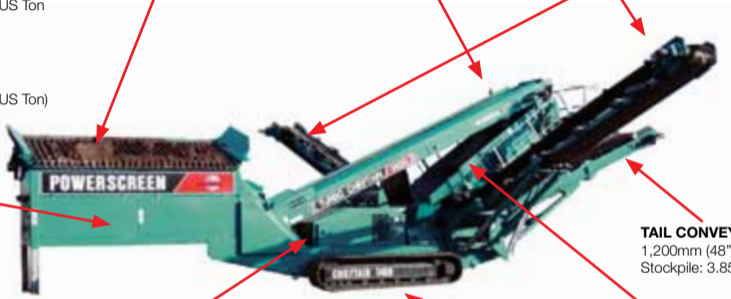
14ft = 8.15m³ (10.6cu. yds)
 Variable speed
 Reject grid as standard

MAIN CONVEYOR

1050mm (42") wide

SIDE CONVEYORS

650mm (26") wide
 Hydraulically adjustable
 Stockpile: 4.45m (14'7")

**TAIL CONVEYOR**

1,200mm (48") wide.
 Stockpile: 3.85m (12'7")

POWER UNIT

Diesel hydraulic
 Standard: CAT C4.4 ATAAC 83kW (111hp)
 Option: Deutz TCD2013 LO4 125kW (168hp)
 Hydraulic tank: 576 L (153 US Gal)
 Diesel tank: 336 L (88 US Gal)

SCREENBOX

4 bearing, positive action
 Grease lubrication
 2-deck 3.3m x 1.5m (11' x 5')
 Screen walkway & access ladder

TRACKS

Width: 500mm